

MANUFACTURE STANDARD, MANUFACTURE RELIANCE

# RT-9700

## Semi-auto Chemistry Analyzer

دلتا كير  
DELTA CARE



### Features

- 7" color LCD, touch-screen & keypad
- Reagent open system supports flow cell and cuvette mode, close system on request
- Analytical modes include kinetic, fixed time, bichromatic end-point with or without reagent blank or sample blank, linear or non-linear calibration
- Real-time curve monitoring enhances the reliability of result
- Large memory, up to 75 test protocols can be programmed
- Powerful QC function: Westguard Multi-rule, Levey Jennings plot, 2 controls per test
- Auto power-on self-check

Exclusive distributor



Add : Zohour District, Zagazig 14512 , Egypt .

Tel efax : 0552329695

Mob : 01220108221 - 01024025659 - 01557468221

E-mail : support@guda-tek.com

Website : www.guda-tek.com

# RT-9700

## Semi-auto Chemistry Analyzer

Test Report		
General		Date:28/10/2003
Sample No: 03	Name: XXX	Sex: Male Age: 28
Dept.: xx	Patient No: 003	Sender: XXX
Test	Result	REF Range
ALT	39.311U/L	0.00-40.00
AST	110.239U/L	0.00-37.00
TP	98.225 g/L	46.00-87.00
ALB	52.055 g/L	38.00-44.00



### Reaction Curve




### Programming

Unit	Wavelength	Aspirate vol	Blank	Reagent blank	Calibration	Blank
Normal	0.000	0.000	0.000	0.000	0.000	0.000

### Test List

Page	Test	Unit	Ref	Eq	Appt
1	ALT	U/L	0.00-40.00	1	0.000
2	AST	U/L	0.00-37.00	1	0.000
3	TP	g/L	46.00-87.00	1	0.000
4	ALB	g/L	38.00-44.00	1	0.000

### Calibration

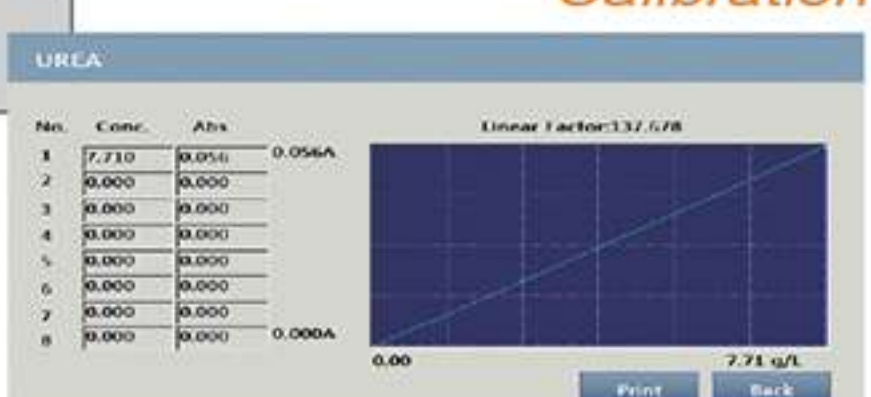

### Quality Control



### Patient Data Management

No.	Name	Sex	Age	Date	Report mode
01	Jack	Male	30	XXX	Normal

### Technical Specifications

Photometric Range	-0.500-2.500Abs
Resolution	0.001Abs(displayed), 0.0001Abs(calculated)
Light Source	Tungsten halogen lamp, 6V/10W
Wavelengths	340, 405, 500, 546, 578, 620, 670nm,
	1 more filter optional
Wavelength Accuracy	±1nm
Half band width	≤10nm
Aspirate Volume	200~6000µL
Carryover	<1%
Memory	75 test protocols, maximum 10000 test result
Interface	RS-232, USB, LAN
Flow Cell	30µL quartz flow cell
Cuvette Mode	12.5mm*12.5mm cuvette optional
Temperature Control	25°C, 30°C, 37°C ±0.5°C and ambient temperature
Display	7" color LCD (800*480 pixels)
Input	Mouse and optional external keyboard

Exclusive distributor



Add : Zohour District, Zagazig 14512 , Egypt .

Tel efax : 0552329695

Mob : 01220108221 - 01024025659 - 01557468221

E-mail : support@guda-tek.com

Website : www.guda-tek.com